

1 2 3 4 5 6 7 8 9 10 11 12 13 14 15 16 17 18 19 20 21 22 23 24 25 26 27 28 29 30 31 32 33 34 35 36 37 38 39 40 41 42 43 44 45 46 47 48 49 50 51 52 53 54 55 56 57 58 59 60 61 62 63 64 65 66 67 68 69 70 71 72 73 74 75 76 77 78 79 80 81 82 83 84 85 86 87 88 89 90 91 92 93 94 95 96 97 98 99 100 101 102 103 104 105 106 107 108 109 110 111 112 113 114 115 116 117 118 119 120 121 122 123 124 125 126 127 128 129 130 131 132 133 134 135 136 137 138 139 140 141 142 143 144 145 146 147 148 149 150 151 152 153 154 155 156 157 158 159 160 161 162 163 164 165 166 167 168 169 170 171 172 173 174 175 176 177 178 179 180 181 182 183 184 185 186 187 188 189 190 191 192 193 194 195 196 197 198 199 200 201 202 203 204 205 206 207 208 209 210 211 212 213 214 215 216 217 218 219 220 221 222 223 224 225 226 227 228 229 230 231 232 233 234 235 236 237 238 239 240 241 242 243 244 245 246 247 248 249 250 251 252 253 254 255 256 257 258 259 260 261 262 263 264 265 266 267 268 269 270 271 272 273 274 275 276 277 278 279 280 281 282 283 284 285 286 287 288 289 290 291 292 293 294 295 296 297 298 299 300 301 302 303 304 305 306 307 308 309 310 311 312 313 314 315 316 317 318 319 320 321 322 323 324 325 326 327 328 329 330 331 332 333 334 335 336 337 338 339 340 341 342 343 344 345 346 347 348 349 350 351 352 353 354 355 356 357 358 359 360 361 362 363 364 365 366 367 368 369 370 371 372 373 374 375 376 377 378 379 380 381 382 383 384 385 386 387 388 389 390 391 392 393 394 395 396 397 398 399 400 401 402 403 404 405 406 407 408 409 410 411 412 413 414 415 416 417 418 419 420 421 422 423 424 425 426 427 428 429 430 431 432 433 434 435 436 437 438 439 440 441 442 443 444 445 446 447 448 449 450 451 452 453 454 455 456 457 458 459 460 461 462 463 464 465 466 467 468 469 470 471 472 473 474 475 476 477 478 479 480 481 482 483 484 485 486 487 488 489 490 491 492 493 494 495 496 497 498 499 500 501 502 503 504 505 506 507 508 509 510 511 512 513 514 515 516 517 518 519 520 521 522 523 524 525 526 527 528 529 530 531 532 533 534 535 536 537 538 539 540 541 542 543 544 545 546 547 548 549 550 551 552 553 554 555 556 557 558 559 560 561 562 563 564 565 566 567 568 569 570 571 572 573 574 575 576 577 578 579 580 581 582 583 584 585 586 587 588 589 590 591 592 593 594 595 596 597 598 599 600 601 602 603 604 605 606 607 608 609 610 611 612 613 614 615 616 617 618 619 620 621 622 623 624 625 626 627 628 629 630 631 632 633 634 635 636 637 638 639 640 641 642 643 644 645 646 647 648 649 650 651 652 653 654 655 656 657 658 659 660 661 662 663 664 665 666 667 668 669 670 671 672 673 674 675 676 677 678 679 680 681 682 683 684 685 686 687 688 689 690 691 692 693 694 695 696 697 698 699 700 701 702 703 704 705 706 707 708 709 710 711 712 713 714 715 716 717 718 719 720 721 722 723 724 725 726 727 728 729 730 731 732 733 734 735 736 737 738 739 740 741 742 743 744 745 746 747 748 749 750 751 752 753 754 755 756 757 758 759 760 761 762 763 764 765 766 767 768 769 770 771 772 773 774 775 776 777 778 779 780 781 782 783 784 785 786 787 788 789 790 791 792 793 794 795 796 797 798 799 800 801 802 803 804 805 806 807 808 809 810 811 812 813 814 815 816 817 818 819 820 821 822 823 824 825 826 827 828 829 830 831 832 833 834 835 836 837 838 839 840 841 842 843 844 845 846 847 848 849 850 851 852 853 854 855 856 857 858 859 860 861 862 863 864 865 866 867 868 869 870 871 872 873 874 875 876 877 878 879 880 881 882 883 884 885 886 887 888 889 890 891 892 893 894 895 896 897 898 899 900 901 902 903 904 905 906 907 908 909 910 911 912 913 914 915 916 917 918 919 920 921 922 923 924 925 926 927 928 929 930 931 932 933 934 935 936 937 938 939 940 941 942 943 944 945 946 947 948 949 950 951 952 953 954 955 956 957 958 959 960 961 962 963 964 965 966 967 968 969 970 971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990 991 992 993 994 995 996 997 998 999 1000 1001 1002 1003 1004 1005 1006 1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031 1032 1033 1034 1035 1036 1037 1038 1039 1040 1

(10) International Publication Number
WO 00/72049 A1

PCT

(51) **International Patent Classification⁷:** G01V 1/00, 1/02

(21) **International Application Number:** PCT/IB00/00654

(22) **International Filing Date:** 16 May 2000 (16.05.2000)

(25) **Filing Language:** English

(26) **Publication Language:** English

(30) **Priority Data:**
60/134,905 19 May 1999 (19.05.1999) US

(71) **Applicant (for CA only):** SCHLUMBERGER CANADA LIMITED [CA/CA]; 24th Floor, Monenco Place, 801 6th Avenue S.W., Calgary, Alberta T2P 3W2 (CA).

(71) **Applicant (for all designated States except CA, FR, US):** SCHLUMBERGER TECHNOLOGY CORPORATION [US/US]; 1325 South Dairy Ashford, Sugar Land, TX 77077 (US).

(71) **Applicant (for FR only):** SERVICES PETROLIERS SCHLUMBERGER [FR/FR]; 42, rue Saint Dominique, F-75007 Paris (FR).

(72) **Inventor; and**

(75) **Inventor/Applicant (for US only):** MOLDOVEANU, Nicolae [CA/US]; 4611 Green Tail Drive, Houston, TX 77084 (US).


(74) **Agent:** STOOLE, Brian, D.; Geco-Prakla (UK) Limited, Schlumberger House, Buckingham Gate, Gatwick, West Sussex RH6 0NZ (GB).

(81) **Designated States (national):** AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) **Designated States (regional):** ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: IMPROVED SEISMIC SURVEYING METHOD

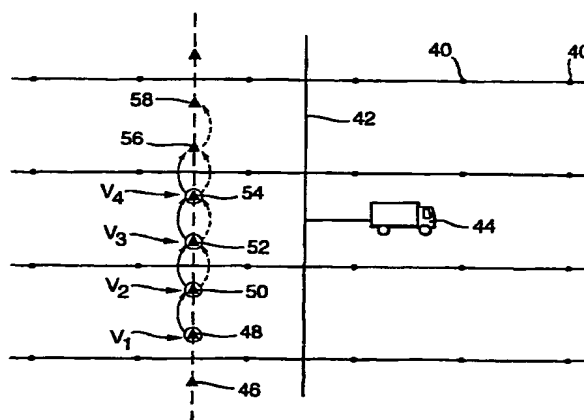

(57) Abstract: An improved method of acquiring seismic data using a plurality of vibratory seismic sources including the steps of deploying a seismic sensor; deploying a plurality of vibratory seismic sources at different source points; simultaneously actuating the seismic sources; acquiring seismic data attributable to the seismic sources using the seismic sensor; redeploying at least two seismic sources, one seismic source being thereby positioned at a source point previously occupied by the other seismic source; simultaneously actuating the redeployed seismic sources; and acquiring seismic data attributable to the redeployed seismic sources using said seismic sensor. The present invention also involves an improved method of acquiring seismic data using a plurality of vibratory seismic sources, where each seismic source is capable of producing seismic energy within given frequency ranges, including the steps of deploying a seismic sensor; deploying a plurality of vibratory seismic sources at different source points; simultaneously actuating the seismic sources in such a manner that the frequency range of the seismic energy produced by one seismic source is substantially outside the frequency range of the seismic energy produced by another seismic source; and acquiring seismic data attributable to the seismic sources using the seismic sensor.

WO 00/72049 A1

WO 00/72049 A1



Published:

— With international search report.

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

IMPROVED SEISMIC SURVEYING METHOD

Background of the Invention

This invention relates generally to seismic surveying methods, and more particularly to an improved seismic surveying method of using a plurality of vibratory seismic sources.

Seismic vibrators have been used for many years on land to acquire seismic data and many companies have ongoing efforts to utilize similar sources in marine environments. The geophysical and environmental benefits of using these types of seismic sources are well known.

When seismic data is acquired utilizing a plurality of vibratory seismic sources, the vibrators are conventionally organized as a travelling source array. The vibrators are typically placed around or along a source point (also referred to as a "vibrator point" or a "vib point") with a particular separation distance, such as 40 meters. The vibrators then generate a certain number of sweeps that are received by a plurality of seismic sensors, recorded and stacked (i.e. combined) to produce a seismic data trace for each particular source point/receiver point pairing. The vibrators then travel as a group to the next source point where they are used in a similar manner.

There are several known problems with acquiring seismic data using seismic vibrators, however, including the need to acquire large numbers of relatively-long records for each source point/receiver point pair to produce seismic data having a sufficiently high signal to noise ratio. Other known problems with seismic data acquisition using seismic vibrators include harmonics, ground coupling differences, baseplate flexures, and source array effects.

Efforts have been made to address these problems, and one promising approach has been the simultaneous use of multiple vibrators at different source points, with each vibrator producing separable, encoded sweeps. One method using this approach, referred to as the High Fidelity Vibroseis Source ("HFVS") method, has been developed by Mobil Oil Corporation and Atlantic Richfield Company and is described in U.S. Patent Nos. 5,550,786 (August 27, 1996); 5,570,833 (December 30, 1997); 5,715,213 (February 3, 1998); and 5,721,710 (February 24, 1998), all incorporated herein by reference. The HFVS method was developed primarily to improve the fidelity of vibroseis data.

The HFVS method may be described, in principle, as comprising the following steps:

1. Measuring the vibrator motion S for each vibrator and each sweep, typically using an accelerometer mounted to the vibrator base-plate. The measured signal S is related to the true vibrator output U and a minimum phase transfer function T_1 . In the frequency domain, the equation describing the measured signal S is: $S = U * T_1$.
2. Recording the seismic data R . This seismic data represents the multiplication in the frequency domain between the earth reflectivity E , the vibrator output U and a minimum phase transfer function T_2 : $R = U * T_2 * E$.
3. Obtaining the earth reflectivity at the vibrator location by multiplying the record R with the inverse of the vibrator motion U : $R/U = T_1/T_2 * E$

For an array of 4 vibrators, V_1 , V_2 , V_3 , and V_4 , sweeping simultaneously, the geophone response R is described in the frequency domain by the following linear equation: $R = m_{11} * h_1 + m_{12} * h_2 + m_{13} * h_3 + m_{14} * h_4$. This equation contains 4 unknowns, h_1 , h_2 , h_3 , and h_4 (the earth response at the vibrator positions V_1 , V_2 ,

V_3 , and V_4) and contains the known values R (the geophone response) and m_{11} , m_{12} , m_{13} , and m_{14} (the measured signals).

The unknowns h_1 , h_2 , h_3 , and h_4 can be determined if another 3 sweeps are generated at the same locations and if the sweeps are encoded in such a way that the measured signal matrix is invertible. The system of linear equations is:

$$R_1 = m_{11} \cdot h_1 + m_{12} \cdot h_2 + m_{13} \cdot h_3 + m_{14} \cdot h_4$$

$$R_2 = m_{21} \cdot h_1 + m_{22} \cdot h_2 + m_{23} \cdot h_3 + m_{24} \cdot h_4$$

$$R_3 = m_{31} \cdot h_1 + m_{32} \cdot h_2 + m_{33} \cdot h_3 + m_{34} \cdot h_4$$

$$R_4 = m_{41} \cdot h_1 + m_{42} \cdot h_2 + m_{43} \cdot h_3 + m_{44} \cdot h_4$$

In matrix notation, this can be written as:

$$R = m \times h$$

where

$$R = \begin{bmatrix} R_1 \\ R_2 \\ R_3 \\ R_4 \end{bmatrix}, m = \begin{bmatrix} m_{11} & m_{12} & m_{13} & m_{14} \\ m_{21} & m_{22} & m_{23} & m_{24} \\ m_{31} & m_{32} & m_{33} & m_{34} \\ m_{41} & m_{42} & m_{43} & m_{44} \end{bmatrix}, \text{ and } h = \begin{bmatrix} h_1 \\ h_2 \\ h_3 \\ h_4 \end{bmatrix}.$$

The typical implementation of the HFVS method in the field involves one array or group of vibrators, often four, spread out on an equal number of consecutive stations or source points. The vibrators sweep a certain number of sweeps, let say N (N being greater than or equal to the number of vibrators) at the same locations. The sweeps have the same frequency content but the phase is differently encoded to assure that the matrix M is invertible. After N sweeps, the vibrators move up a number of stations equal to the number of vibrators and repeat the sequence.

This implementation of the HFVS method has typically performed well in areas with shallow targets and good signal to noise ratios. For deeper targets or poor signal to noise areas, the standard implementation of the HFVS method may not perform well. The number of traces required for each source/receiver pair (the "fold") is also quite high, making acquisition of seismic data using this method relatively expensive.

It is therefore desirable to implement an improved method of acquiring seismic data using a plurality of vibratory seismic sources that overcomes problems exhibited by prior art seismic data acquisition methods.

An object of the present invention is to provide an improved method of acquiring seismic data using a plurality of vibratory seismic sources.

An advantage of the present invention is that for the same acquisition effort and expense, seismic data having a higher signal to noise ratio may be obtained.

Another advantage of the present method is that if coherent noise in the seismic data is band limited, it may be attenuated only in a particular frequency range, leaving the remaining frequency components of the seismic data unaffected.

Summary of the Invention

The present invention provides an improved method of seismic surveying using a plurality of vibratory seismic sources, the method including the steps of:

deploying at least one seismic sensor;

deploying a plurality of vibratory seismic sources at different source points;

simultaneously actuating said seismic sources;

acquiring seismic data attributable to said seismic sources using said seismic sensor;

redeploying said seismic sources so that at least one of them is positioned at a source point previously occupied by another of them;

simultaneously actuating said redeployed seismic sources;

acquiring seismic data attributable to said redeployed seismic sources using said seismic sensor;

decomposing said acquired seismic data into components attributable to each said seismic source; and

stacking together components attributable to seismic sources located at a common source point.

The invention and its benefits will be better understood with reference to the detailed description below and the accompanying drawings.

Brief Description of the Drawings

Figure 1 is a process flow chart showing steps associated with the inventive method;

Figure 2 is schematic plan view of an exemplary seismic data equipment layout scheme;

Figure 3 is an exemplary amplitude versus frequency plot for a plurality of vibrators;

Figure 4 is a fold distribution and seismic data section produced using a prior art seismic data acquisition method;

Figure 5 is a seismic data section produced using the inventive station-shifting technique; and

Figure 6 is a seismic data section produced using the inventive station-shifting and frequency splitting techniques.

Detailed Description of the Invention

Figure 1 is a process flowchart showing steps associated with the present method. The steps in Figure 1 will be discussed in connection with the schematic plan view of deployed land seismic acquisition equipment shown in Figure 2.

As noted in Figure 1, typically the first step of the method sequence 10 is the "deploy seismic sensor" step 12. In Figure 2, a plurality of seismic sensors 40, often geophones, are shown deployed along a plurality of parallel lines and connected to a data telemetry cable 42 which transmits the output of the sensors to a recording truck 44 where the acquired seismic data is recorded and often initially processed. Figure 2 depicts a typical 3D land seismic survey layout, but it is only one of a vast number of alternative seismic sensor deployment schemes that could be utilized in connection with the inventive method.

Typically the second step of the method sequence 10 is the "deploy seismic sources" step 14. In Figure 2, source points 46 are represented as triangles and four vibrators V_1 , V_2 , V_3 , and V_4 (represented as circles) are being used in this seismic survey. Initially, in this example, vibrator V_1 is located at

source point 48, vibrator V_2 is located at source point 50, vibrator V_3 is located at source point 52, and vibrator V_4 is located at source point 54.

Typically the third step of the method sequence 10 is the "simultaneously actuate seismic sources" step 14, in which all four vibrators are simultaneously actuated to produce four successive sweeps each. In general, if there are N vibrators, each will be actuated to produce M successive sweeps, where M is not less than N . The vibrators will often be both phase and frequency encoded to provide enhanced signal separability. The phase encoding scheme for could, for instance, comprise the following:

	V_1	V_2	V_3	V_4
Sweep 1	90	0	0	0
Sweep 2	0	90	0	0
Sweep 3	0	0	90	0
Sweep 4	0	0	0	90

Other methods for phase encoding the vibrator sweeps are described in the references incorporated earlier. This phase encoding assures the invertibility of the vibrator motion matrix.

To enhance the separability of the signals, the sweep bandwidth is split among the vibrators using a frequency splitting technique to provide an additional degree of orthogonality to the source signals. If the sweep bandwidth required in a certain geologic area is between f_1 and f_2 and an array of four vibrators are used to acquire the seismic data, the bandwidth may be split in the following way.

$$\begin{aligned}
 V_1: & [f_1, f_1 + (f_2 - f_1)/4]; \\
 V_2: & [f_1 + (f_2 - f_1)/4, f_1 + (f_2 - f_1)/2]; \\
 V_3: & [f_1 + (f_2 - f_1)/2, f_1 + (f_2 - f_1)*3/4]; \text{ and} \\
 V_4: & [f_1 + (f_2 - f_1)*3/4, f_2].
 \end{aligned}$$

Seismic vibrators are, however, typically hydraulically driven mechanical devices that lack the ability to rigidly cut off the production of seismic energy at any particular frequency. Generally they taper or ramp down the energy produced at the highest and lowest desired frequencies. To account for this behavior, referred to as the "sweep taper", a small overlap between the bandwidths for each vibrator may be desirable. This is shown in graphical form in Figure 3.

As discussed above, the desired range of frequencies is divided by the number of vibrators (in this case four) and, in addition, each of the vibrators may be assigned different (and slightly overlapping) frequency ranges. In Figure 3, the desired range of frequencies is from 8 to 97 Hz. By following the frequency separation scheme described above, vibrator V_1 attempts to produce seismic energy matching the first curve 60 (8-31 Hz), vibrator V_2 attempts to produce seismic energy matching the second curve 62 (30-53 Hz), vibrator V_3 attempts to produce seismic energy matching the third curve 64 (52-75 Hz), and vibrator V_4 attempts to produce seismic energy matching the fourth curve 66 (74-97 Hz). The first sweep taper region 68 overlaps the second sweep taper region 70 between 30 and 31 Hz. Similar sweep taper overlaps occur between 52 and 53 Hz and between 74 and 75 Hz.

In terms of separability of the received signals, it would be preferable to eliminate any overlap of these taper zones. In many cases, however, it is desired to produce a source signal that is spectrally flat, i.e. that has substantially the same amplitude over the entire frequency range. If the signal is phase (as well as frequency) encoded, the spectral flatness benefits may outweigh the reduction in separability this minor overlapping of the frequency spectra produces. The inventive method does not require that a spectrally flat signal be produced, however. In some cases, for instance, it may be preferable to weight or concentrate the seismic energy with respect to a particular frequency range or ranges, particularly if geologic conditions in a particular area substantially

attenuate reflected seismic energy outside a certain narrow frequency range or ranges.

For each of the four sweeps produced when the seismic sources V_1 to V_4 are simultaneously actuated, the seismic sensors 40 will receive the seismic data in the "acquire seismic data" step 18. The seismic data is typically transmitted back to a recording truck 44 where it is recorded, preferably along with signals from respective accelerometers on each vibrator representative of the vibrator motion.

When the required number of records have been obtained, the seismic sources are redeployed in the "shift seismic sources" step 20. Using one implementation of the station-shifting technique, vibrator V_4 is shifted to source point 56, vibrator V_3 is shifted to source point 54, vibrator V_2 is shifted to source point 52, and vibrator V_1 is shifted to source point 50. The "simultaneously actuate seismic sources" step 22 and the "acquire seismic data" step 24 are then repeated the required number of times for that particular equipment layout.

Typically, the vibrators will continue to produce seismic energy in their assigned split frequency ranges, as discussed above, but other frequency range assignment schemes can easily be envisioned. For source separability reasons, it is important that the frequency range of the seismic energy produced by one simultaneously actuated seismic source be substantially outside the frequency range of the seismic energy produced by another simultaneously actuated seismic source. Preferably at least half of the seismic energy produced by one seismic source occupies a different frequency spectrum than half of the seismic energy produced by another simultaneously actuated seismic source. As noted above, some overlapping of the frequency ranges may actually be desirable, but the purpose of this frequency splitting is to allow the received seismic data to be decomposed into components attributable to different source points based, at least in part, on their differing frequency contents.

Path 26 shows that this process is repeated until the required number of records have been acquired for each vibrator for each source point. The next time the seismic sources are shifted, vibrator V_4 is shifted to source point 58, vibrator V_3 is shifted to source point 56, vibrator V_2 is shifted to source point 54, and vibrator V_1 is shifted to source point 52. After the required number of traces are acquired in this deployment setup, the vibrators are shifted one more station toward the top of Figure 2, and the required number of traces are acquired in this new deployment setup. After completing this fourth acquire seismic data step, it will be appreciated that each of the vibrators (V_1 , V_2 , V_3 , and V_4) have been deployed at source point 54.

Each of the traces acquired by a particular seismic sensor while a vibrator was located at source point 54 will then be decomposed or separated in the "decompose acquired seismic data" step 28. Typically this decomposition process results in individual traces for each sweep each vibrator generated at the particular source point. If four vibrators are used and they each produced four sweeps at the source point, there would be 16 output traces, four each in four separate frequency band groups. Collectively, these four separate frequency band groups cover the entire seismic bandwidth required for the seismic survey.

To increase the signal to noise ratio of the seismic data, these traces are combined ("vertically stacked") in the "stack decomposed seismic data" step 30. The traces may also be filtered prior to this stacking step. In some areas, noise, such as ground roll noise or power line noise, will be frequency band-limited. In these cases it may be desirable, for instance, to filter the frequency-limited traces containing this noise before they are stacked. This may be advantageous because noise attenuation methods may be used on the noise affected data without fearing that the noise attenuation methods may corrupt the seismic signals in the other sweep frequency ranges. This stacking process may consist of merely averaging all of the signals or more sophisticated stacking methods may be used such as the diversity stacking method discussed in U.S. Patent No. 3,398,396 to P. Embree or the covariant stacking method discussed in our PCT

Patent Application PCT/GB98/03819 (WO 99/32903) to G. Baeten, both of which are incorporated herein by reference. It should be noted that the word "stacking" when used in this context simply refers to combining and does not imply normal moveout correction or reduction to zero offset.

A significant advantage of the inventive method compared to prior art seismic data acquisition methods is that the signal to ambient noise ratio of the seismic data may be significantly improved. The signal to noise ratio of seismic data acquired using vibratory seismic sources may be calculated using the following equation:

$$\text{Signal/ambient noise} = NV * \text{SQRT}(NS * L * W)$$

where:

NV = number of vibrators;

NS = number of sweeps;

L = sweep length; and

W = sweep bandwidth.

By increasing the number of vibrators deployed at each source point (albeit sequentially, not simultaneously), the number of sweeps and the sweep length can both be reduced while simultaneously improving the signal to noise ratio of the acquired seismic data.

The separability of the sources is improved using the split bandwidth technique because the fundamental for each sweep is different and the first order harmonics generated by the third and fourth vibrator do not overlap the first and second sweep frequencies. The inventive method is capable of attenuating not only pneumatically introduced harmonics but also vibrator base-plate/earth interface introduced harmonics.

The amplitude spectrum produced by the vibrators also has larger values for narrow bandwidths and the same sweep length.

$$\text{Amplitude spectrum} = A_f \cdot \text{SQRT}(T/4 \cdot W)$$

where:

A_f = amplitude of the fundamental;

T = sweep length; and

W = sweep bandwidth.

Each of the vibrators is therefore able to transmit a greater quantity of seismic energy into the ground per time unit by limiting the bandwidth swept.

Even if the sweep bandwidth used is the same for each vibrator (i.e. the frequency splitting technique is not used), the vertical stacking/station-shifting method will still improve the signal to ambient noise ratio of the acquired seismic data. When using the vertical stacking/station-shifting technique, any specific vibrator correlated noise will be attenuated because the seismic data associated with the particular source/receiver pair will consist of data associated with each of the vibrators. In addition, the data associated with any particular source/receiver pair will typically be acquired over a larger time window, thereby helping to attenuate any ambient noise that is time variant.

The seismic data produced by the inventive method will then typically be subjected to other seismic data processing techniques such as filtering, migration, etc. that are well known in the seismic data processing art.

The benefits associated with the inventive method were confirmed using both synthetic data and in a field experiment. The results of the field experiment, which was conducted in the Delaware Basin, Ward Country, West Texas, are shown in Figures 4, 5, and 6. It should be noted that in contrast to the 3D

acquisition geometry shown in Figure 1, these field experiments were conducted using a 2D acquisition geometry, where the sources (vibrators) and the receivers (geophones) are deployed along a common line.

Figure 4 shows the results of a conventional 2D HFVS seismic survey. In this experiment, four vibrators were used, the sweep frequency was from 8 to 96 Hertz, the sweep length was 10 seconds, the number of sweeps produced at each vibrator point was 8, the receiver interval spacing was 200 feet, the shot interval spacing was 50 feet, the listening time after each sweep was five seconds, and the number of stations each vibrator was shifted after completing its sweeps was 4 (200 feet). As can be seen in the fold bar chart 80 at the top of Figure 4, the fold produced by these acquisition parameters is approximately 60. The seismic data were then processed using a standard HFVS processing sequence (separation, spiking deconvolution, NMO correction, derive and apply statics, CMP sort, and stack) to produce the reference seismic data section 82 shown in Figure 4.

This reference seismic data section 82 can be compared against the improved seismic data section 86 shown in Figure 5. In this experiment, many of the parameters used were identical to those used in the previous experiment: four vibrators were used, the sweep frequency was from 8 to 96 Hertz, the receiver interval spacing was 200 feet, the shot interval spacing was 50 feet, and the listening time after each sweep was five seconds. The same vibrators, sensors, and recording equipment were used for this experiment and it was conducted over the same area as the first experiment. The sweep length was, however, reduced from 10 to 4 seconds, the number of sweeps at each vibrator point was reduced from 8 to 4, and the number of stations each vibrator was shifted after completing its sweeps was 1 (50 feet). As can be seen in the fold bar chart 84 at the top of Figure 5, the fold produced by these acquisition parameters was approximately 15 (a four-fold reduction from the previous experiment). The acquired seismic data were then processed using the same processing sequence to produce improved seismic data section 86. Many more coherent reflectors can

be seen in this improved seismic data section 86 than in the reference seismic data section 82.

An experiment was also conducted using both the one-station station-shifting technique and the frequency separation technique. The results of this experiment are presented in Figure 6. The only difference between this experiment and the previous experiment, the results of which are shown in Figure 5, is that the four vibrators used separate sweep frequencies of 8-31, 30-53, 52-75, and 74-97 Hz, as discussed earlier. The fold was therefore unchanged, remaining at approximately 15 as shown in the fold bar chart 88 at the top of Figure 6. It should also be noted that the seismic data section 90 was created using only the 8-31 Hz bandwidth data because the frequency response in the test area was very narrow. The enhanced seismic data section 90 appears to provide an even clearer depiction of the subsurface geology than the improved seismic data section 86.

It will be readily understood that the steps and processes associated with the disclosed embodiment of the present method are capable of a wide variety of alternative implementation methods and only a limited section from an actual seismic survey is discussed above. The described experiments imaged pressure-pressure transmission mode seismic energy, but the method is not limited to this particular seismic energy transmission mode and could, for instance, image pressure-shear converted transmission mode, shear-shear transmission mode, or multi-component seismic data. The seismic data acquired may be inverted using recorded vibrator output (using an HFVS-like method), may be inverted based on a theoretical or optimal vibrator output, or may be processed using other types of processing algorithms. The present method is also in no way limited or restricted to the particular order of steps described above.

CLAIMS

1. A method of seismic surveying using a plurality of vibratory seismic sources, the method including the steps of:

deploying at least one seismic sensor;

deploying a plurality of vibratory seismic sources at different source points;

simultaneously actuating said seismic sources;

acquiring seismic data attributable to said seismic sources using said seismic sensor;

redeploying said seismic sources so that at least one of them is positioned at a source point previously occupied by another of them;

simultaneously actuating said redeployed seismic sources;

acquiring seismic data attributable to said redeployed seismic sources using said seismic sensor;

decomposing said acquired seismic data into components attributable to each said seismic source; and


stacking together components attributable to seismic sources located at a common source point.

2. A method according to claim 1, wherein said simultaneously actuating steps each comprise simultaneously actuating each seismic source M times at each source point, where M is not less than the number of seismic sources.

3. A method according to claim 1 or claim 2, further including the step of noise attenuating at least one of said components before said components are stacked together.
4. A method according to any preceding claim, wherein the respective outputs of said seismic sources are recorded and used in processing said acquired seismic data.
5. A method according to any preceding claim, wherein said seismic data is inverted using theoretical or optimal seismic source output.
6. A method according to any preceding claim, wherein each said seismic source is capable of producing seismic energy within a respective frequency range and the frequency range of the seismic energy produced by one said seismic source is substantially outside the frequency range of seismic energy produced by another said seismic source when said seismic sources are simultaneously actuated.
7. A method according to claim 6, wherein said seismic sources have sweep tapers and a sweep taper of one said seismic source overlaps a sweep taper of another said seismic source.
8. A method according to claim 6 or claim 7, wherein the frequency range of one said seismic source has first order harmonics that do not overlap the frequency range of another said seismic source.
9. A method according to any preceding claim, wherein said redeploying step comprising shifting said seismic sources one said source point in a common direction along a common path.

1/5

Fig.1.

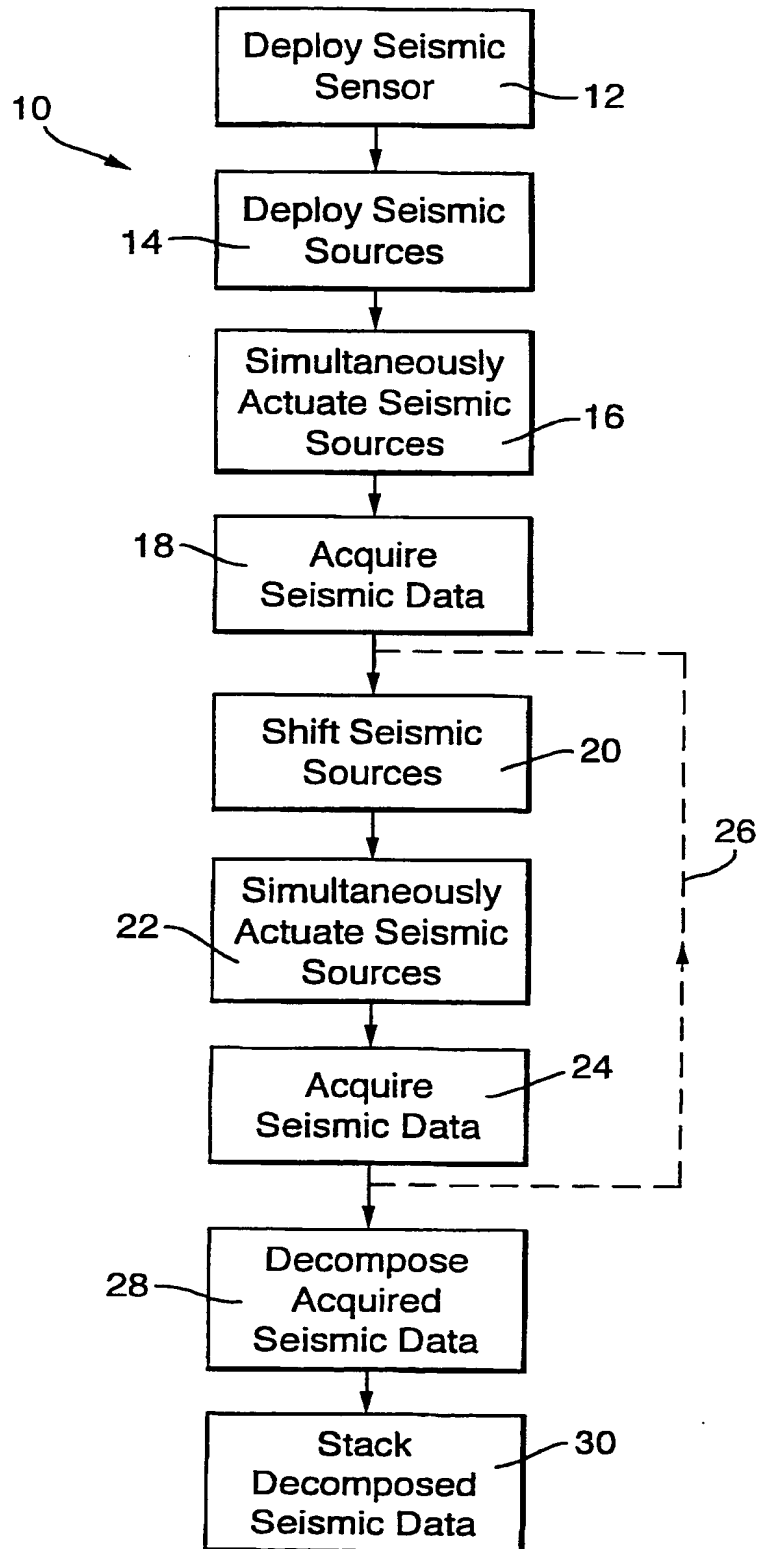

2/5

Fig.2.



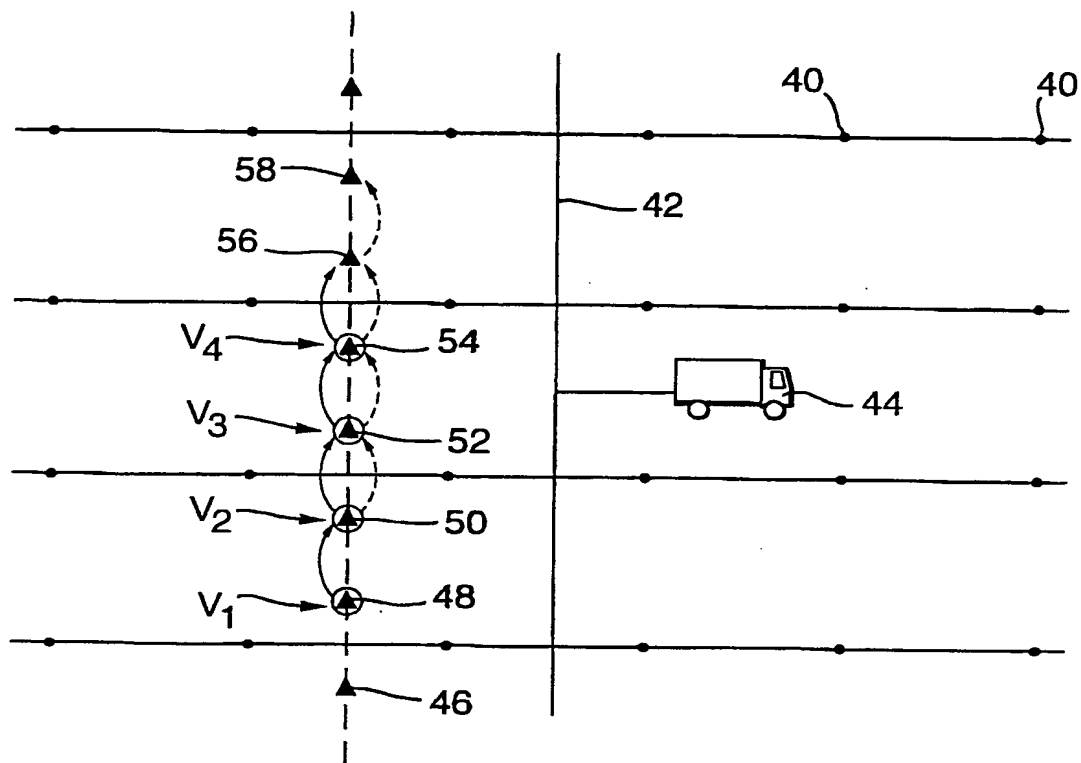


Fig.3.

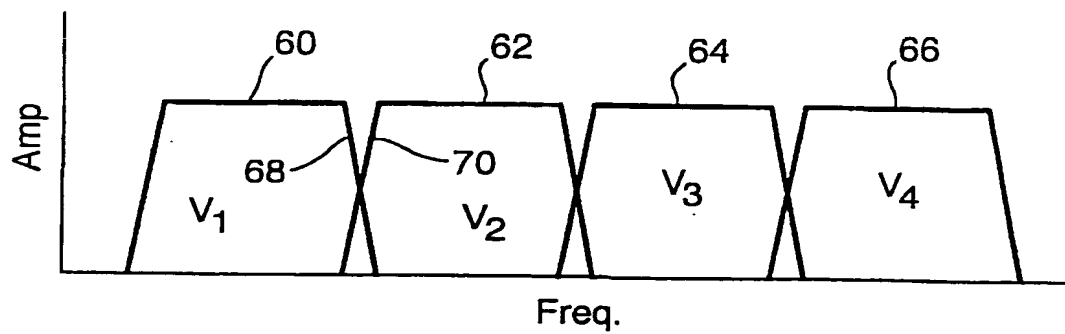


3/5

Fig.4.

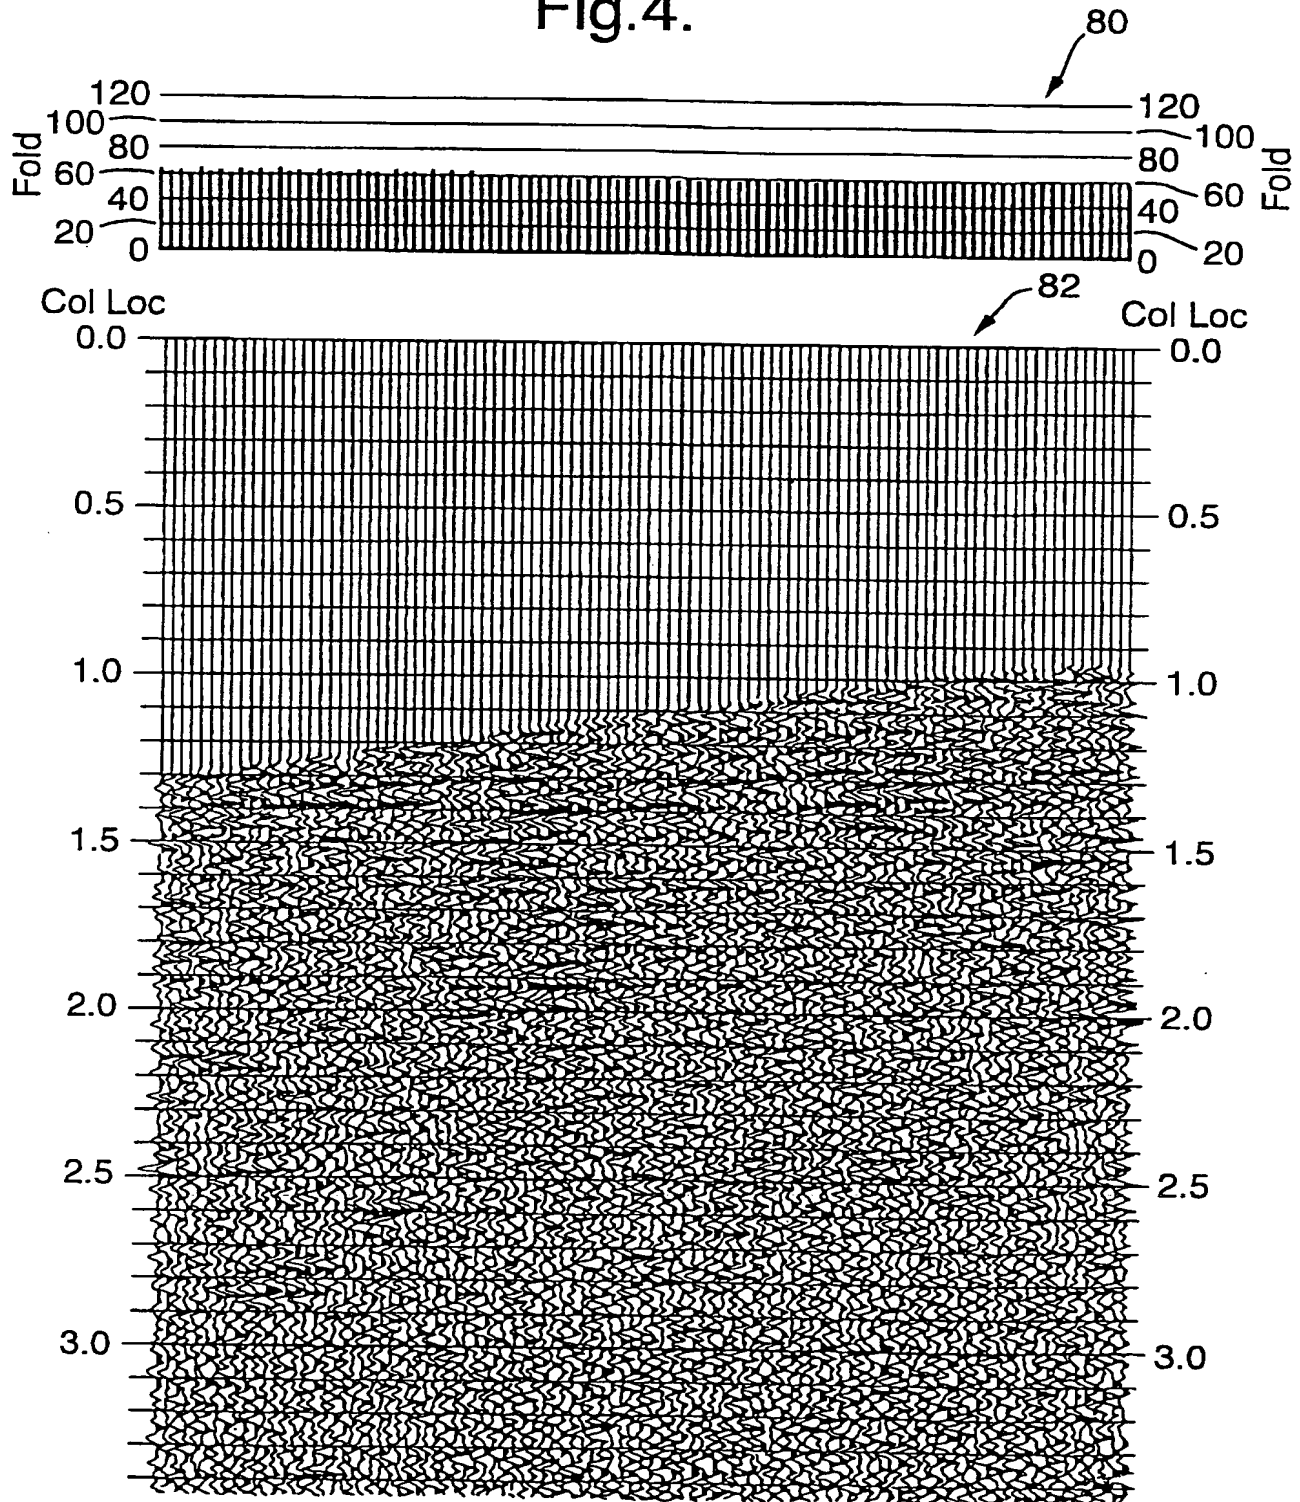


4/5

Fig.5.

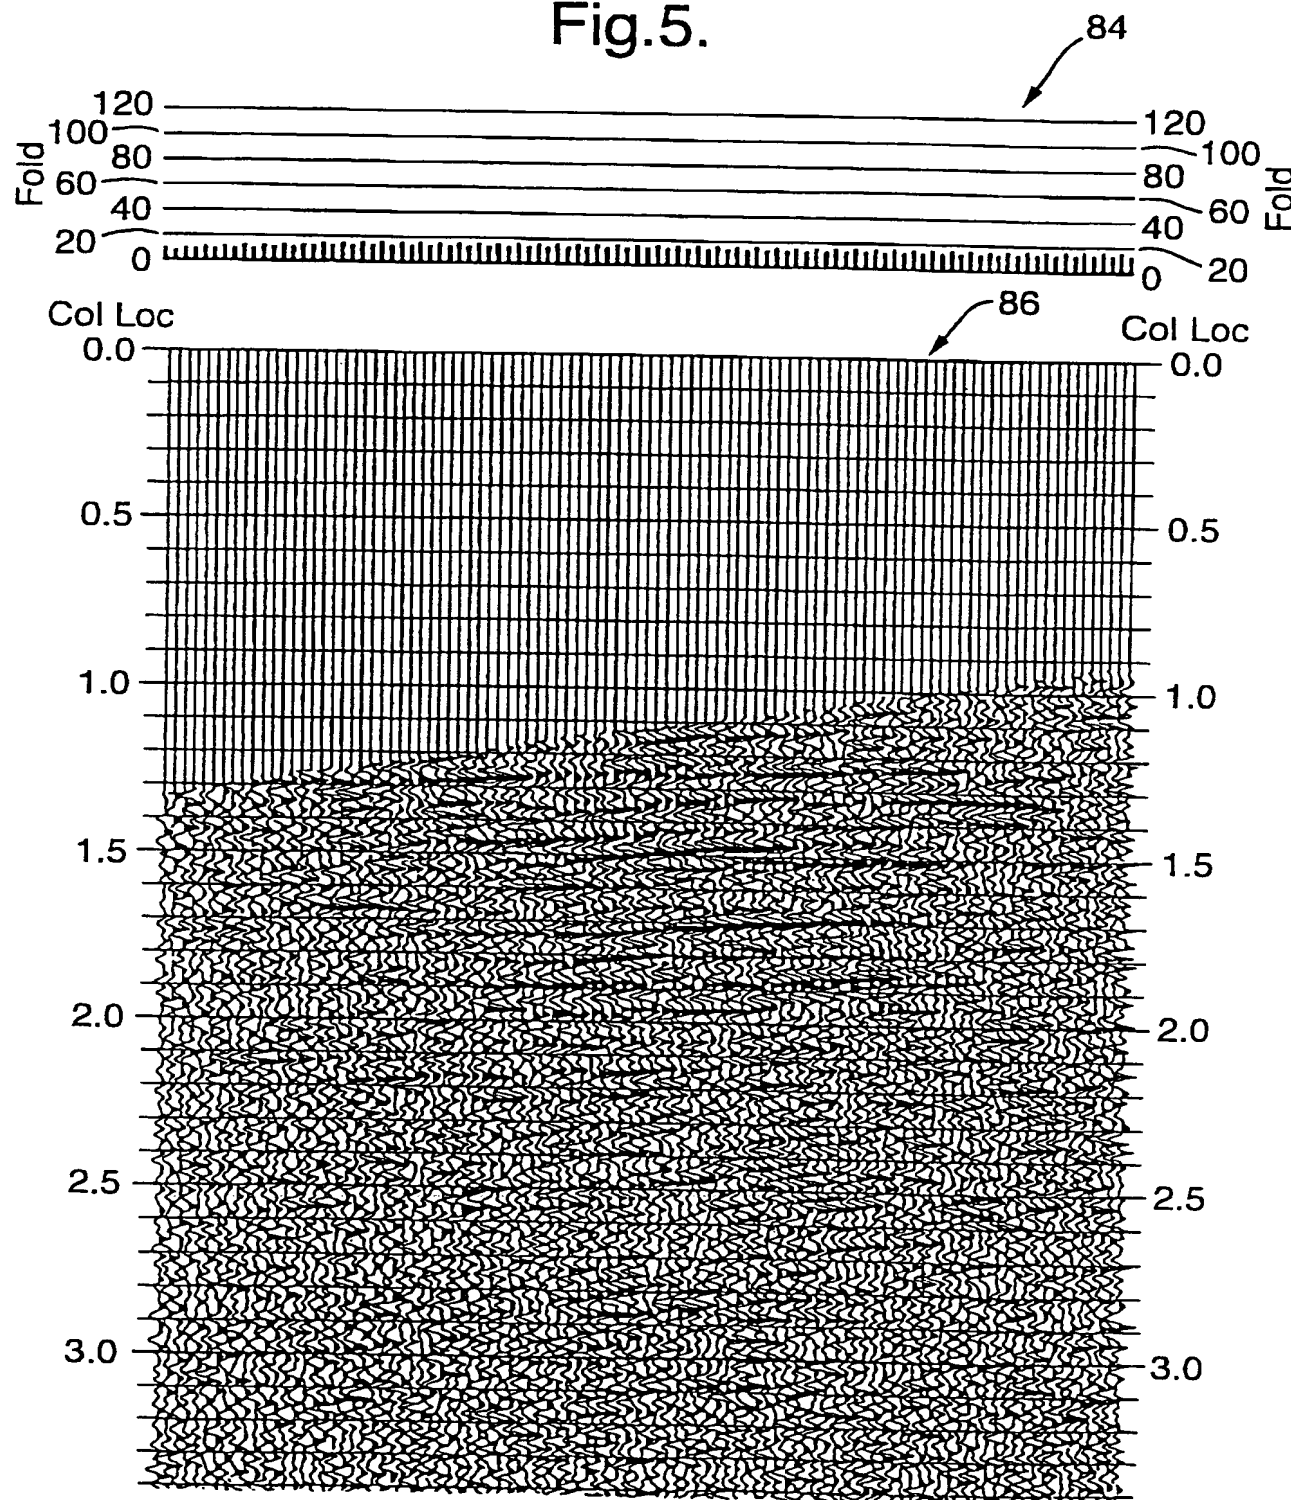

5/5

Fig.6.

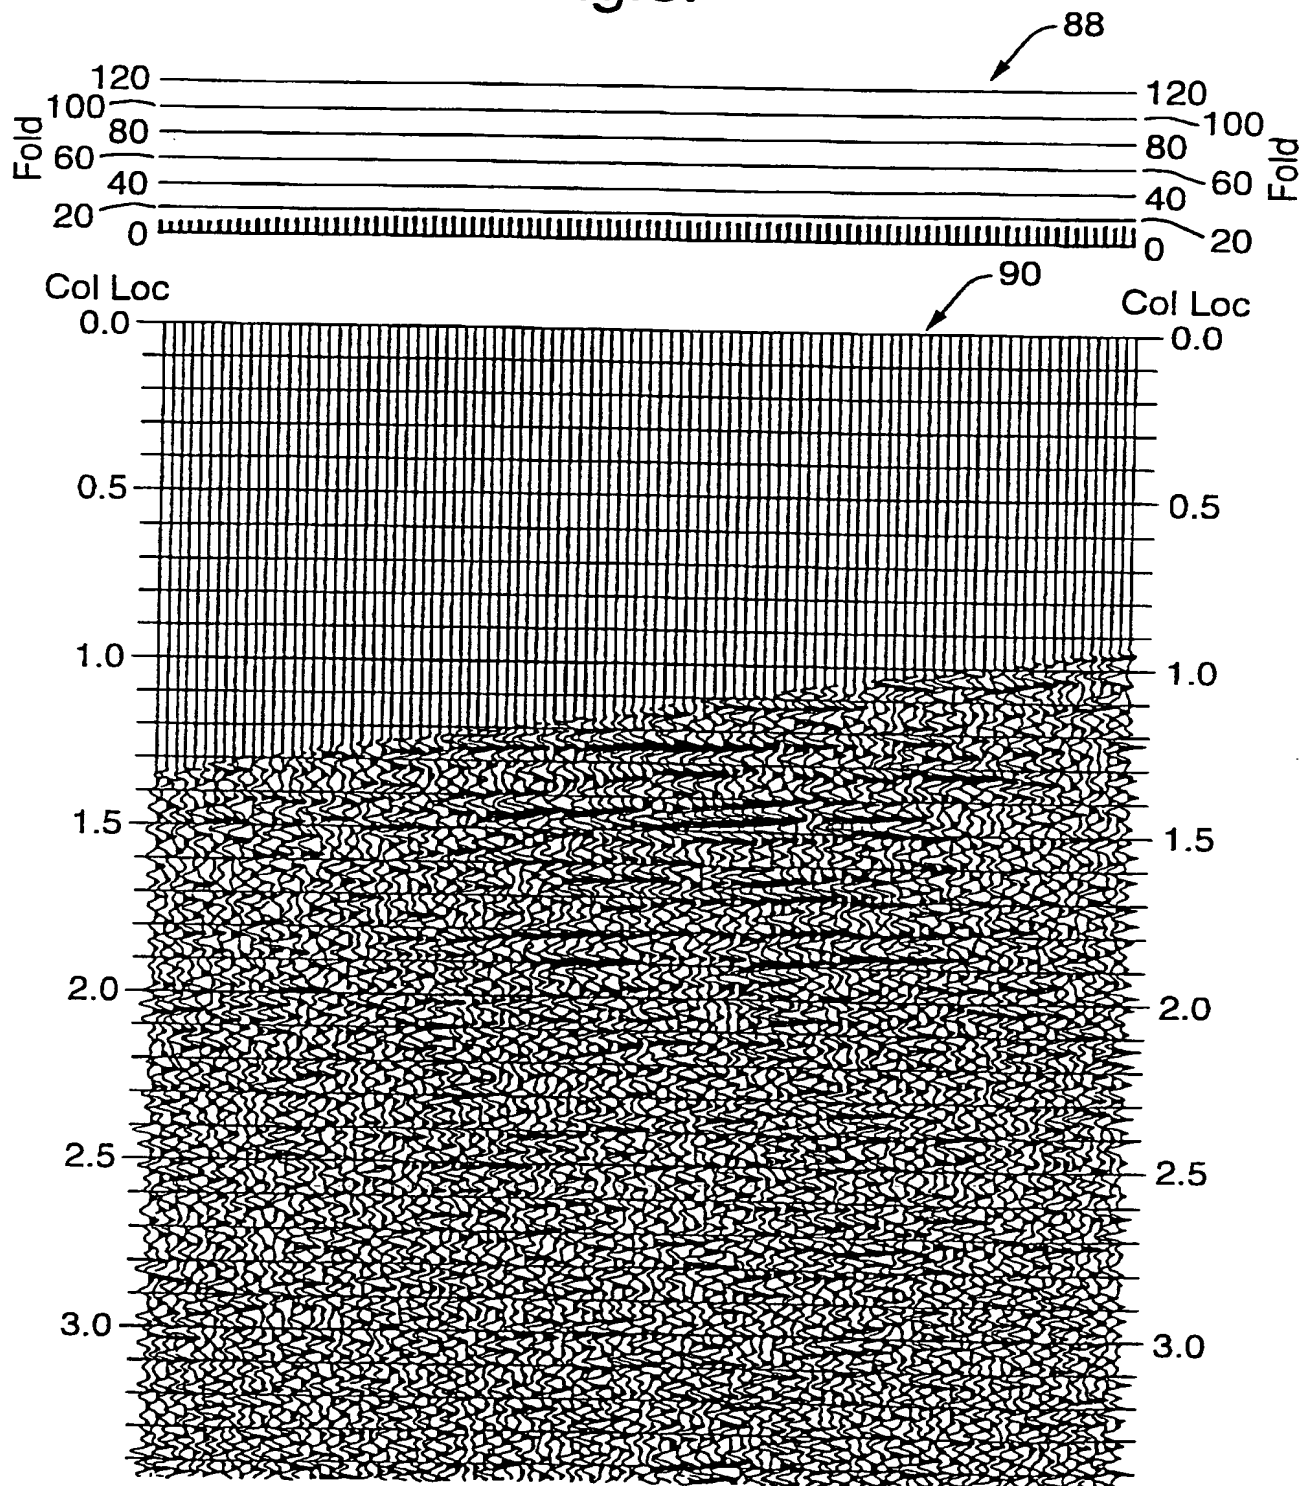

INTERNATIONAL SEARCH REPORT

Patent Application No
PCT/IB 00/00654A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 G01V1/00 G01V1/02

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 G01V

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, PAJ, INSPEC, COMPENDEX

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 914 636 A (GARROTTA ROBERT J) 3 April 1990 (1990-04-03)	1,4,6,7, 9
Y	abstract; claims 1,2,8,19; figures 2-4,6,7 column 2, line 26 -column 4, line 34 ---	2,3,5,8
Y	US 4 823 326 A (WARD ROGER M) 18 April 1989 (1989-04-18)	2
A	abstract; figures 2-5 column 4, line 8 - line 17 column 6, line 59 - line 66 column 9, line 17 - line 29 ---	8
Y	US 5 850 622 A (VASSILIOU ANTHONY A ET AL) 15 December 1998 (1998-12-15) abstract; figure 4 --- -/--	3

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

4 August 2000

Date of mailing of the international search report

11/08/2000

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

De Bekker, R

INTERNATIONAL SEARCH REPORT

Application No

PCT/IB 00/00654

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 5 703 833 A (ALLEN KENNETH PAUL) 30 December 1997 (1997-12-30) cited in the application	5
A	abstract; figures 1,2	3
Y	US 3 885 225 A (ANSTEY NIGEL A ET AL) 20 May 1975 (1975-05-20)	8
A	figure 5 column 6, line 11 - line 19	1,2,6
X	WO 97 18488 A (MOBIL OIL CORP) 22 May 1997 (1997-05-22) abstract; claims 1,3	1
X	FR 2 338 499 A (BARBIER MAURICE) 12 August 1977 (1977-08-12)	1,6
A	page 1, line 21 - line 38; figures 1,2 page 2, line 9 - line 20 page 2, line 35 - page 3, line 1 page 3, line 33 - line 39; claims 4,5 page 5, line 15 - line 22 page 6, line 21 - line 27 page 1, line 34 - line 38	2
A	US 4 982 374 A (EDINGTON B LEON ET AL) 1 January 1991 (1991-01-01) column 1, line 14 - line 51	1,2
A	US 4 037 190 A (MARTIN LINCOLN A) 19 July 1977 (1977-07-19) abstract column 5, line 9 - line 22	8
A	US 5 721 710 A (SALLAS JOHN J ET AL) 24 February 1998 (1998-02-24) cited in the application abstract	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

Patent Application No

PCT/IB 00/00654

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4914636 A	03-04-1990	FR 2622022 A AT 65611 T AU 2395388 A BR 8805427 A CA 1325840 A DE 3863895 D EP 0313459 A MX 171345 B	21-04-1989 15-08-1991 20-04-1989 20-06-1989 04-01-1994 29-08-1991 26-04-1989 20-10-1993
US 4823326 A	18-04-1989	NONE	
US 5850622 A	15-12-1998	CA 2242757 A EP 0873527 A NO 983130 A WO 9820367 A	14-05-1998 28-10-1998 07-09-1998 14-05-1998
US 5703833 A	30-12-1997	CA 2235411 A CN 1201530 A EP 0861450 A NO 982146 A WO 9718491 A	22-05-1997 09-12-1998 02-09-1998 13-05-1998 22-05-1997
US 3885225 A	20-05-1975	GB 1423366 A AU 5825473 A CA 984048 A	04-02-1976 23-01-1975 17-02-1976
WO 9718488 A	22-05-1997	US 5822269 A CA 2233856 A CN 1202252 A EP 0861448 A NO 982144 A	13-10-1998 22-05-1997 16-12-1998 02-09-1998 13-05-1998
FR 2338499 A	12-08-1977	NONE	
US 4982374 A	01-01-1991	DE 69008998 D DE 69008998 T EP 0425250 A	23-06-1994 01-09-1994 02-05-1991
US 4037190 A	19-07-1977	US 4058791 A US 4189704 A	15-11-1977 19-02-1980
US 5721710 A	24-02-1998	US 5719821 A BR 9706780 A CA 2237408 A EP 0927369 A NO 982271 A WO 9812578 A	17-02-1998 04-01-2000 26-03-1998 07-07-1999 17-07-1998 26-03-1998